

# Jumboweigher



## Features and benefits:

- Large bright LED display
- High accuracy
- Aluminium housing
- Power saving mode
- Push button tare
- Hold function
- Large keys make operation simple even when wearing gloves


The Jumboweigher crane scale is a popular choice among steel service centres and other heavy industrial applications because it is a cost-effective alternative to its more expensive rivals, yet a far safer option over low-cost crane weighers. The Jumboweigher series of crane scales offer high capacity, quality, accuracy and safety at low capacity prices. They are utilised worldwide in a variety of manufacturing and industrial applications.

As with all Straightpoint products, each Jumboweigher crane scale receives superior electronics, excellent build quality, certified calibration and proof testing. The heavy duty crane scale is extremely accurate, manufactured from quality materials, and features a high-strength aluminium alloy outer housing.

Each unit is equipped with a large and bright LED display that can be easily read, even in direct sunlight. The simple to use remote features oversized buttons, enabling use with gloved hands, providing control of tare and hold functions. Battery charging intervals are extended by the standby power-saving mode, as well as the automatic shut off feature. As with all Straightpoint products, each Jumboweigher is safety tested and is supplied with certification of calibration and proof testing.

When looking for a high-quality, cost-effective crane scale and are unwilling to give up features and safety, look no further than the Jumboweigher crane scale from Straightpoint.



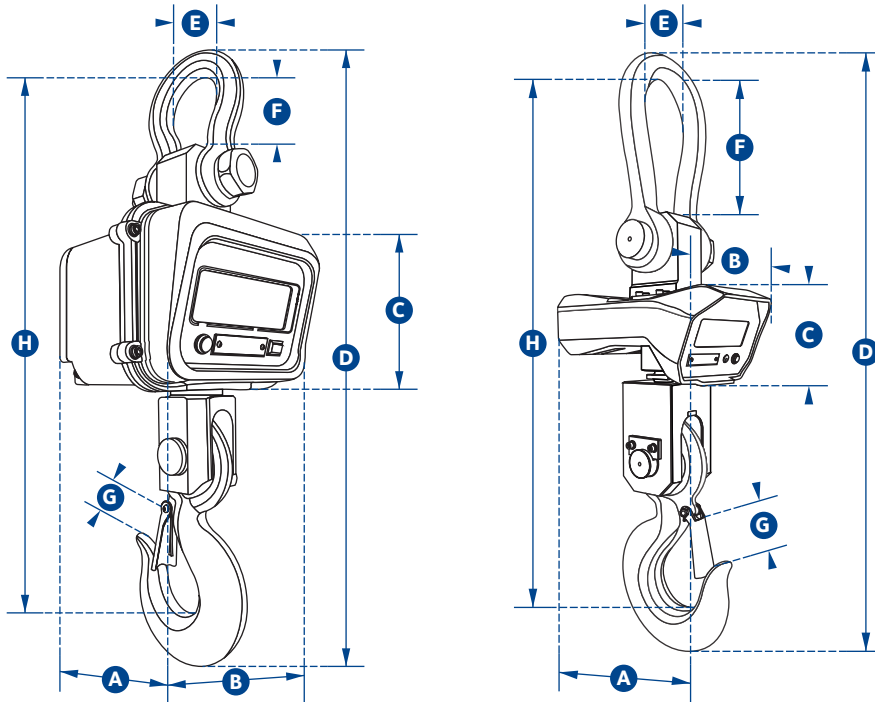

Part Numbers			
SP	JW5T	JW10T	JW20T
Crosby	2789033	2789031	2789032
Capacity	5000kg	10000kg	20000kg
	11000lb	22000lb	44000lb
Resolution	2kg	5kg	10kg
	5lb	10lb	20lb
Units	kg		
	lb		
Weight	18kg	29kg	75kg
	40lb	64lb	165lb
Safety Factor	5:1		
Battery Type	Internal rechargeable		
Battery Life	20hrs		
Display Type	30mm or 1.18" LED		
Operating Temp	-10°C to +40°C or 14°F to 104°F		
Accuracy	±0.1% of full scale		
Protection	IP54 or NEMA3		
Dimension A	195	195	355
	7.68"	7.68"	13.98"
Dimension B	255	255	230
	10.04"	10.04"	9.06"
Dimension C	180	180	165
	7.09"	7.09"	6.50"
Dimension D	715	780	1115
	28.15"	30.71"	43.90"
Dimension E	72	90	140
	2.83"	3.54"	5.51"
Dimension F	90	110	230
	3.54"	4.33"	9.06"
Dimension G	36	50	70
	1.42"	1.97"	2.76"
Dimension H	595	660	980
	23.43"	25.98"	38.58"